

HCHC[®]

长源液压



合肥长源液压股份有限公司

公司地址: 中国安徽省合肥市当涂北路瑶海工业园珍珠路

传真: +86-551-64391155
国内市场电话: 4008-123-910
+86-551-64391100 +86-551-64391122
邮箱: sale@hchc.cn

国际市场电话: +86-551-64396718
邮箱: export01@hchc.cn
售后支持热线: 400-887-9946

相关链接:
<http://ahhchc.en.alibaba.com>
<https://ahhchc.1688.com>
<http://ahhchc.en.made-in-china.com>

Hefei Changyuan Hydraulic CO.,LTD.

Company address: Yaohai Industrial Park, North Dangtu Road, Hefei, China

Fax: +86-551-64391155
Domestic market telephone: 4008-123-910
+86-551-64391100 +86-551-64391122
E-mail: sale@hchc.cn

International market Tel.: +86-551-64396718
E-mail: export01@hchc.cn
After service : 400-887-9946

Related links:
<http://ahhchc.en.alibaba.com>
<https://ahhchc.1688.com>
<http://ahhchc.en.made-in-china.com>

www.hchc.cn



长源液压公众号



官网二维码

农业机械常用液压元件

HYDRAULIC COMPONENTS IN AGRICULTURAL MACHINERY



CBKP 铝制 Aluminium

公称排量 NOMINAL DISPLACEMENT: 25-100mL/r
 额定压力 RATED PRESSURE: 20MPa
 最高压力 MAXIMUM PRESSURE: 25MPa
 额定转速 RATED SPEED: 2000r/min
 转速范围 SPEED RANGE: 500-2500r/min
 * 轴向间隙自动补偿机构
 * 高强度材料, 具有较高的功率密度比
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * HIGH STRONG MATERIAL, WITH HIGHER POWER DENSITY RATIO.



CBTZTA/FA-F 铸铁 Cast Iron

公称排量 NOMINAL DISPLACEMENT: 8-40mL/r
 额定压力 RATED PRESSURE: 20MPa
 最高压力 MAXIMUM PRESSURE: 25MPa
 额定转速 RATED SPEED: 2000r/min
 转速范围 SPEED RANGE: 800-2500r/min
 * 轴向间隙自动补偿机构
 * 整体刚性强, 耐冲击性能好, 噪音低
 * 复合安全阀, 简化系统
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * STRONG OVERALL RIGIDITY, GOOD IMPACT RESISTANCE, LOW NOISE.
 * PATENT STRUCTURE, GOOD STARTING PERFORMANCE.



CBWL-E3/E3 铝制 Aluminium

公称排量 NOMINAL DISPLACEMENT: 10-20/6-20mL/r
 额定压力 RATED PRESSURE: 16/16MPa
 最高压力 MAXIMUM PRESSURE: 20/20MPa
 额定转速 RATED SPEED: 2500r/min
 转速范围 SPEED RANGE: 600-3000r/min
 * 轴向间隙自动补偿机构
 * 高强度材料, 具有较高的功率密度比
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * HIGH STRONG MATERIAL, WITH HIGHER POWER DENSITY RATIO.



ZDa5a-10 系列整体式多路阀 MONOBLOCK VALVE

公称压力 NOMINAL PRESSURE: 25MPa
 公称流量 NOMINAL FLOW RATE: 50L/min
 阀杆行程 SPOOL STROKE: 5+5mm
 * 适用于中小马力拖拉机
 * SUITABLE FOR SMALL AND MEDIUM HORSEPOWER TRACTORS.



FP66 单阀分配器 SINGLE VALVE DISTRIBUTOR

公称压力 NOMINAL PRESSURE: 25MPa
 公称流量 NOMINAL FLOW RATE: 90L/min
 阀杆行程 SPOOL STROKE: 9+8+7mm
 * 适用于全马力段拖拉机提升器
 * SUITABLE FOR ALL - POWER TRACTOR HOIST.



DLSG5-20 系列多路换向阀 DIRECTIONAL VALVE

公称压力 NOMINAL PRESSURE: 25MPa
 公称流量 NOMINAL FLOW RATE: 100L/min
 阀杆行程 SPOOL STROKE: O型 7+7mm
 Q型 7+7+7mm
 阀芯直径 THE VALVE CORE DIAMETER: ϕ 19
 * 适用于中大马力拖拉机
 * SUITABLE FOR MEDIUM AND HIGH POWER TRACTORS.



CBQT 铝制 Aluminium

公称排量 NOMINAL DISPLACEMENT: 25-63/10-32mL/r
 额定压力 RATED PRESSURE: 16/20 20MPa
 最高压力 MAXIMUM PRESSURE: 20/25 25MPa
 额定转速 RATED SPEED: 2000/2500r/min
 转速范围 SPEED RANGE: 600-3000r/min
 * 轴向间隙自动补偿机构
 * 高强度材料, 具有较高的功率密度比
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * HIGH STRONG MATERIAL, WITH HIGHER POWER DENSITY RATIO.

HCHC 长源液压

拖拉机常用液压元件 HYDRAULIC COMPONENTS IN TRACTORS

- 液压泵/马达 GEAR PUMP/MOTOR
- 液压阀 HYDRAULIC VALVE
- 液压油缸 HYDRAULIC CYLINDER



CBT-F4 铝制 Aluminium

公称排量 NOMINAL DISPLACEMENT: 10-32mL/r
 额定压力 RATED PRESSURE: 20MPa
 最高压力 MAXIMUM PRESSURE: 25MPa
 额定转速 RATED SPEED: 2500r/min
 转速范围 SPEED RANGE: 600-3000r/min
 * 轴向间隙自动补偿机构
 * 高强度材料, 具有较高的功率密度比
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * HIGH STRONG MATERIAL, WITH HIGHER POWER DENSITY RATIO.



DFG*-15 系列多路换向阀 DIRECTIONAL VALVE

公称压力 NOMINAL PRESSURE: 25MPa
 公称流量 NOMINAL FLOW RATE: 50L/min
 阀杆行程 SPOOL STROKE: O型 8+8mm Q型 5+5+5mm
 * 提升器联B口集成整体式机械锁, 提升自动复位, 适用于中大马力拖拉机
 * INTEGRATED MECHANICAL LOCK FOR LIFTER JOINT B PORT, LIFTING AUTOMATIC RESET, SUITABLE FOR MEDIUM AND HIGH POWER TRACTORS.



DYEDL-F20L 系列多路换向阀 DIRECTIONAL VALVE

公称压力 NOMINAL PRESSURE: 31.5MPa
 公称流量 NOMINAL FLOW RATE: 100L/min
 控制电压 SPOOL STROKE: DC24V/12V
 * 主要应用于大马力拖拉机
 * 远程电动控制也可近距离手动操纵
 * 配置电比例电磁阀块控制提升器
 * MAINLY USED IN HIGH-HORSEPOWER TRACTORS, WHICH CAN BE REMOTELY CONTROLLED BY ELECTRIC OR MANUALLY OPERATED AT CLOSE RANGE, EQUIPPED WITH ELECTRIC PROPORTIONAL SOLENOID VALVE BLOCK TO CONTROL THE LIFTER



DLSG*-20 系列多路换向阀 DIRECTIONAL VALVE

公称压力 NOMINAL PRESSURE: 25MPa
 公称流量 NOMINAL FLOW RATE: 100L/min
 阀杆行程 SPOOL STROKE: O型 7+7mm Q型 7+7+7mm
 阀芯直径 THE VALVE CORE DIAMETER: ϕ 19
 * 提升器联A口集成整体式机械锁, 提升自动复位, 适用于大马力拖拉机
 * INTEGRATED MECHANICAL LOCK FOR LIFTER JOINT A PORT, LIFTING AUTOMATIC RESET, SUITABLE FOR MEDIUM AND HIGH POWER TRACTORS.



DF28-15 系列多路换向阀 DIRECTIONAL VALVE

公称压力 NOMINAL PRESSURE: 25MPa
 公称流量 NOMINAL FLOW RATE: 50L/min
 阀杆行程 SPOOL STROKE: O型 5+5mm
 Q型 6.5+6.5+4mm
 阀芯直径 THE VALVE CORE DIAMETER: ϕ 16
 * 提升器联B口集成整体式机械锁, 适用于中大马力拖拉机
 * INTEGRATED MECHANICAL LOCK FOR LIFTER JOINT B PORT, SUITABLE FOR MEDIUM AND HIGH POWER TRACTORS.



CBTLJ 铝制 Aluminium

公称排量 NOMINAL DISPLACEMENT: 16-25/6-10mL/r
 额定压力 RATED PRESSURE: 16MPa
 最高压力 MAXIMUM PRESSURE: 20MPa
 额定转速 RATED SPEED: 2500r/min
 转速范围 SPEED RANGE: 800-3000r/min
 * 轴向间隙自动补偿机构
 * 高强度材料, 具有较高的功率密度比
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * HIGH STRONG MATERIAL, WITH HIGHER POWER DENSITY RATIO.



*本册所列均为农机行业部分常用产品, 如有其它需求请联系我们。
 *Only listed as some products commonly applied in the tractors here, if you have other requirements, please contact us.



DLS22-20 系列多路换向阀 DIRECTIONAL VALVE

公称压力 NOMINAL PRESSURE: 25MPa
 公称流量 NOMINAL FLOW RATE: 100L/min
 阀杆行程 SPOOL STROKE: O型 7+7mm
 Q型 7+7+7mm
 * 提升器联B口集成整体式机械锁, 适用于中大马力拖拉机
 * INTEGRATED MECHANICAL LOCK FOR LIFTER JOINT B PORT, SUITABLE FOR MEDIUM AND HIGH POWER TRACTORS.



CBTLZTA-F/F 铸铁 Cast Iron

公称排量 NOMINAL DISPLACEMENT: 6-40mL/r
 额定压力 RATED PRESSURE: 20MPa
 最高压力 MAXIMUM PRESSURE: 25MPa
 额定转速 RATED SPEED: 2000r/min
 转速范围 SPEED RANGE: 800-2500r/min
 * 轴向间隙自动补偿机构
 * 整体刚性强, 耐冲击性能好, 噪音低
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * STRONG OVERALL RIGIDITY, GOOD IMPACT RESISTANCE, LOW NOISE.



ZDF-15 系列多路换向阀 DIRECTIONAL VALVE

公称压力 NOMINAL PRESSURE: 35MPa
 公称流量 NOMINAL FLOW RATE: 80L/min
 阀杆行程 SPOOL STROKE: O型 5+5mm
 Q型 5+5+5mm
 * 适用于中大马力拖拉机
 * SUITABLE FOR MEDIUM AND HIGH POWER TRACTORS.



CBTZTA-F 铸铁 Cast Iron

公称排量 NOMINAL DISPLACEMENT: 8-40mL/r
 额定压力 RATED PRESSURE: 20MPa
 最高压力 MAXIMUM PRESSURE: 25MPa
 额定转速 RATED SPEED: 2000r/min
 转速范围 SPEED RANGE: 800-2500r/min
 * 轴向间隙自动补偿机构
 * 整体刚性强, 耐冲击性能好, 噪音低
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * STRONG OVERALL RIGIDITY, GOOD IMPACT RESISTANCE, LOW NOISE.



CBW-*3 铝制 Aluminium

公称排量 NOMINAL DISPLACEMENT: 4-20mL/r
 额定压力 RATED PRESSURE: 20MPa
 最高压力 MAXIMUM PRESSURE: 25MPa
 额定转速 RATED SPEED: 2500r/min
 转速范围 SPEED RANGE: 800-3000r/min
 * 轴向间隙自动补偿机构
 * 高强度材料, 具有较高的功率密度比
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * HIGH STRONG MATERIAL, WITH HIGHER POWER DENSITY RATIO.



CMWDE-F 铝制 Aluminium

公称排量 NOMINAL DISPLACEMENT: 4-20mL/r
 额定压力 RATED PRESSURE: 20MPa
 最高压力 MAXIMUM PRESSURE: 25MPa
 额定转速 RATED SPEED: 2500r/min
 转速范围 SPEED RANGE: 800-3000r/min
 * 轴向间隙自动补偿机构
 * 高强度材料, 具有较高的功率密度比
 * 专利结构, 启动性能好, 低噪音
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * HIGH STRONG MATERIAL, WITH HIGHER POWER DENSITY RATIO.
 * PATENT STRUCTURE, GOOD STARTING PERFORMANCE, LOW NOISE.



CBHV 铸铁 Cast Iron

公称排量 NOMINAL DISPLACEMENT: 15-36mL/r
 额定压力 RATED PRESSURE: 20MPa
 最高压力 MAXIMUM PRESSURE: 25MPa
 额定转速 RATED SPEED: 2000r/min
 转速范围 SPEED RANGE: 400-3000r/min
 * 轴向间隙自动补偿机构, 齿形修形
 * 整体刚性强, 耐冲击性能好, 噪音低
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * TOOTH SHAPE MODIFICATION
 * STRONG OVERALL RIGIDITY, GOOD IMPACT RESISTANCE, LOW NOISE.



CBHZ 铸铁 Cast Iron

公称排量 NOMINAL DISPLACEMENT: 23-36mL/r
 额定压力 RATED PRESSURE: 20MPa
 最高压力 MAXIMUM PRESSURE: 25MPa
 额定转速 RATED SPEED: 2500r/min
 转速范围 SPEED RANGE: 600-3000r/min
 * 轴向间隙自动补偿机构, 齿形修形
 * 整体刚性强, 耐冲击性能好, 噪音低
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * TOOTH SHAPE MODIFICATION
 * STRONG OVERALL RIGIDITY, GOOD IMPACT RESISTANCE, LOW NOISE.



CBTLAW 铝制/铸铁 Aluminium/Cast Iron

公称排量 NOMINAL DISPLACEMENT: 30/10mL/r
 额定压力 RATED PRESSURE: 20MPa
 最高压力 MAXIMUM PRESSURE: 25MPa
 额定转速 RATED SPEED: 2500r/min
 转速范围 SPEED RANGE: 600-3000r/min
 * 轴向间隙自动补偿机构
 * 高强度材料, 具有较高的功率密度比
 * 前后泵不串油, 前后盖为铸铁
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * HIGH STRONG MATERIAL, WITH HIGHER POWER DENSITY RATIO.



CBWC 铝制 Aluminium

公称排量 NOMINAL DISPLACEMENT: 8mL/r
 额定压力 RATED PRESSURE: 20MPa
 最高压力 MAXIMUM PRESSURE: 25MPa
 额定转速 RATED SPEED: 2500r/min
 转速范围 SPEED RANGE: 800-3000r/min
 * 轴向间隙自动补偿机构
 * 高强度材料, 具有较高的功率密度比
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * HIGH STRONG MATERIAL, WITH HIGHER POWER DENSITY RATIO.



CBWKF 铝制 Aluminium

公称排量 NOMINAL DISPLACEMENT: 16mL/r
 额定压力 RATED PRESSURE: 20MPa
 最高压力 MAXIMUM PRESSURE: 25MPa
 额定转速 RATED SPEED: 2500r/min
 转速范围 SPEED RANGE: 800-3000r/min
 * 轴向间隙自动补偿机构
 * 高强度材料, 具有较高的功率密度比
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * HIGH STRONG MATERIAL, WITH HIGHER POWER DENSITY RATIO.



CMW-F 铝制 Aluminium

公称排量 NOMINAL DISPLACEMENT: 4-20mL/r
 额定压力 RATED PRESSURE: 20MPa
 最高压力 MAXIMUM PRESSURE: 25MPa
 额定转速 RATED SPEED: 2500r/min
 转速范围 SPEED RANGE: 800-3000r/min
 * 轴向间隙自动补偿机构
 * 高强度材料, 具有较高的功率密度比
 * 专利结构, 启动性能好, 噪音低
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * HIGH STRONG MATERIAL, WITH HIGHER POWER DENSITY RATIO.
 * PATENT STRUCTURE, GOOD STARTING PERFORMANCE, LOW NOISE



DCF 系列多路换向阀

DIRECTIONAL VALVE
 公称压力 NOMINAL PRESSURE: 31.5MPa
 公称流量 NOMINAL FLOW RATE: 50L/min
 控制电压 SPOOL STROKE: DC24V/DC12V
 * 整体式零泄漏液锁, 电磁线圈直推阀芯, 耐污染直动式溢流阀
 * INTEGRAL ZERO-LEAKAGE HYDRAULIC LOCK, SOLENOID COIL PUSHES VALVE CORE DIRECTLY, CONTAMINATION-RESISTANT DIRECT-ACTING OVERFLOW VALVE



DLT-* 系列多路换向阀

DIRECTIONAL VALVE
 公称压力 NOMINAL PRESSURE: 20MPa
 公称流量 NOMINAL FLOW RATE: 50L/min
 阀杆行程 SPOOL STROKE: 7.5+7.5mm
 * 整体式零泄漏液锁, 阀体整体铸造, 耐污染直动式溢流阀
 * INTEGRAL ZERO-LEAKAGE HYDRAULIC LOCK, VALVE BODY INTEGRAL CASTING, CONTAMINATION-RESISTANT DIRECT-ACTING OVERFLOW VALVE



CBHB-F5 铝制 Aluminium

公称排量 NOMINAL DISPLACEMENT: 8-63mL/r
 额定压力 RATED PRESSURE: 20MPa
 最高压力 MAXIMUM PRESSURE: 25MPa
 额定转速 RATED SPEED: 2500r/min
 转速范围 SPEED RANGE: 600-3000r/min
 * 轴向间隙自动补偿机构
 * 高强度材料, 具有较高的功率密度比
 * 铸铁端盖, 专利结构 耐冲击
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * HIGH STRONG MATERIAL, WITH HIGHER POWER DENSITY RATIO.
 * CAST IRON END CAP, PATENTED STRUCTURE IMPACT RESISTANCE.

HCHC 长源液压

收获机常用液压元件
 HYDRAULIC COMPONENTS IN HARVESTERS

- 液压泵/马达 GEAR PUMP/MOTOR
- 液压阀 HYDRAULIC VALVE
- 液压油缸 HYDRAULIC CYLINDER



EDCF06 电控阀

ELECTRIC VALVE
 最大进口流量 MAX. INLET FLOW: 60 L/min
 最大工作压力 MAX. WORKING PRESSURE: 215 bar
 控制电压 SPOOL STROKE: DC24V/12V
 A1、B1口平衡阀特性 BALANCING VALVE CHARACTER OF A1,B1: 80bar@5L/min
 电源电压 POWER VOLTAGE: 12 VDC
 比例阀线圈阻抗 PROPORTIONAL VALVE COIL IMPEDANCE: 7.2 Ohm @ 20° C
 保护等级 PROTECTION CLASS: IP 67
 * 实现电动控制
 * REALIZE ELECTRIC CONTROL



DYDLa-15 系列电液多路换向阀

ELECTRIC HYDRAULIC VALVE
 公称压力 NOMINAL PRESSURE: 31.5MPa
 公称流量 NOMINAL FLOW RATE: 65L/min
 阀杆行程 SPOOL STROKE: 7+7mm
 * 整体式零泄漏液锁, 电液先导控制
 * INTEGRAL ZERO-LEAKAGE HYDRAULIC LOCK, ELECTRO-HYDRAULIC PILOT CONTROL



CBW-* 铝制 Aluminium

公称排量 NOMINAL DISPLACEMENT: 1.5-6mL/r
 额定压力 RATED PRESSURE: 20MPa
 最高压力 MAXIMUM PRESSURE: 25MPa
 额定转速 RATED SPEED: 2500r/min
 转速范围 SPEED RANGE: 800-3000r/min
 * 轴向间隙自动补偿机构
 * 高强度材料, 具有较高的功率密度比
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * HIGH STRONG MATERIAL, WITH HIGHER POWER DENSITY RATIO.



DF-F15 系列多路换向阀

DIRECTIONAL VALVE
 公称压力 NOMINAL PRESSURE: 25MPa
 公称流量 NOMINAL FLOW RATE: 50L/min
 阀杆行程 SPOOL STROKE: Q型 8+8mm
 Q型 5+5+5mm
 * 耐污式直动安全阀, 阀体材料为高强度蠕墨铸铁
 * CONTAMINATION-RESISTANT DIRECT-ACTING RELIEF VALVE THE VALVE BODY MATERIAL IS HIGH STRENGTH VERMICULAR CAST IRON.



CBW-*3 铝制 Aluminium

公称排量 NOMINAL DISPLACEMENT: 4-20mL/r
 额定压力 RATED PRESSURE: 20MPa
 最高压力 MAXIMUM PRESSURE: 25MPa
 额定转速 RATED SPEED: 2500r/min
 转速范围 SPEED RANGE: 800-3000r/min
 * 轴向间隙自动补偿机构
 * 高强度材料, 具有较高的功率密度比
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * HIGH STRONG MATERIAL, WITH HIGHER POWER DENSITY RATIO.




DLS-F15 系列多路换向阀

DIRECTIONAL VALVE
 公称压力 NOMINAL PRESSURE: 20MPa
 公称流量 NOMINAL FLOW RATE: 50L/min
 阀杆行程 SPOOL STROKE: 7.5+7.5mm
 * 整体式零泄漏液锁, 耐污染直动式溢流阀
 * INTEGRAL ZERO-LEAKAGE HYDRAULIC LOCK, INTEGRAL ZERO-LEAKAGE HYDRAULIC LOCK



CBTLJ 铝制 Aluminium

公称排量 NOMINAL DISPLACEMENT: 16-25/6-10mL/r
 额定压力 RATED PRESSURE: 16MPa
 最高压力 MAXIMUM PRESSURE: 20MPa
 额定转速 RATED SPEED: 2500r/min
 转速范围 SPEED RANGE: 800-3000r/min
 * 轴向间隙自动补偿机构
 * 高强度材料, 具有较高的功率密度比
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * HIGH STRONG MATERIAL, WITH HIGHER POWER DENSITY RATIO.

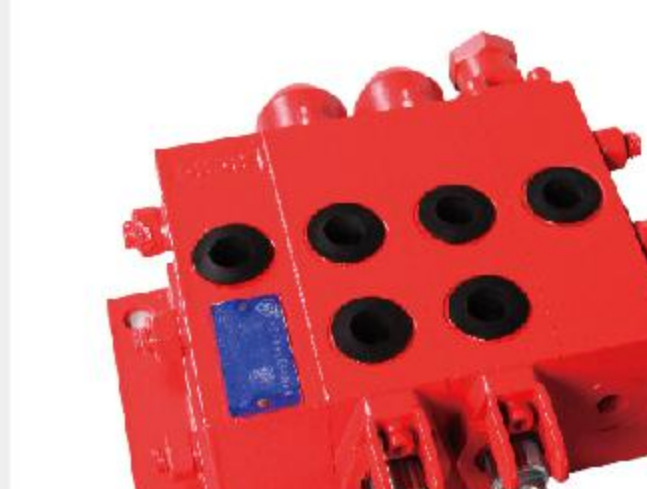

ZS-L10 系列多路换向阀

DIRECTIONAL VALVE
 公称压力 NOMINAL PRESSURE: 20MPa
 公称流量 NOMINAL FLOW RATE: 40L/min
 阀杆行程 SPOOL STROKE: 7+7mm
 * 可配置各种插装阀
 * VARIOUS CARTRIDGE VALVES CAN BE CONFIGURED



*本册所列均为农机行业部分常用产品, 如有其它需求请联系我们。
 *Only listed some products commonly applied in the harvesters here, if you have other requirements, please contact us.



CBWL-E3/E3 铝制 Aluminium

公称排量 NOMINAL DISPLACEMENT: 10-20/6-20mL/r
 额定压力 RATED PRESSURE: 16/16MPa
 最高压力 MAXIMUM PRESSURE: 20/20MPa
 额定转速 RATED SPEED: 2500r/min
 转速范围 SPEED RANGE: 600-3000r/min
 * 轴向间隙自动补偿机构
 * 高强度材料, 具有较高的功率密度比
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * HIGH STRONG MATERIAL, WITH HIGHER POWER DENSITY RATIO.



CBWLKC-E3/E3 铝制 Aluminium

公称排量 NOMINAL DISPLACEMENT: 6-20mL/r
 额定压力 RATED PRESSURE: 16MPa
 最高压力 MAXIMUM PRESSURE: 20MPa
 额定转速 RATED SPEED: 2000r/min
 转速范围 SPEED RANGE: 1350-2500r/min
 * 轴向间隙自动补偿机构
 * 高强度材料, 具有较高的功率密度比
 * 齿形修形, 低噪音
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * HIGH STRONG MATERIAL, WITH HIGHER POWER DENSITY RATIO.
 * TOOTH SHAPE MODIFICATION, LOW NOISE



CBWLKG-F 铝制 Aluminium

公称排量 NOMINAL DISPLACEMENT: 4-10mL/r
 额定压力 RATED PRESSURE: 20MPa
 最高压力 MAXIMUM PRESSURE: 25MPa
 额定转速 RATED SPEED: 1500r/min
 转速范围 SPEED RANGE: 800-1800r/min
 * 轴向间隙自动补偿机构
 * 高强度材料, 具有较高的功率密度比
 * 齿形修形, 低噪音
 * AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
 * HIGH STRONG MATERIAL, WITH HIGHER POWER DENSITY RATIO.
 * TOOTH SHAPE MODIFICATION, LOW NOISE



HCFK* 液压集成阀块

HYDRAULIC BLOCK VALVE
 公称压力 NOMINAL PRESSURE: 31.5MPa
 公称流量 NOMINAL FLOW RATE: 50L/min
 * 整体式零泄漏液锁, 阀体为高强度球墨铸铁, 大流量电磁溢流阀
 * INTEGRAL ZERO-LEAKAGE HYDRAULIC LOCK, THE VALVE BODY MATERIAL IS HIGH STRENGTH DUCTILE CAST IRON LARGE FLOW SOLENOID DISCHARGE VALVE



*支持定制 CUSTOMISED



关于长源液压 COMPANY PROFILE

多年来,我公司被多家客户高度认可,连续多年、多次被各家评为“优秀供应商”。

